# CONTROL4 LUX CONFIGURABLE KEYPAD



# **CONTROL4 LUX CONFIGURABLE KEYPAD** C4-L-KC

The Control4 Lux Configurable Keypad allows dealers to confidently plan the keypad layout and engraving up front, while also providing exceptional flexibility in button configuration. With a single SKU to manage, ordering and inventory become seamless, simplifying the entire process. Dealers can easily adjust the button layout during the design and installation process without needing to order a different SKU. Additionally, if customers decide to change their setup later, adapting to new needs is both straightforward and hassle-free.

#### **Features**

- Lux Configurable Keypad provides flexible button configuration, 120-240VAC or 36-48VDC.
- Can be powered by Control4 Centralized Lighting Bus Power Supply for use in Control4 Centralized Lighting systems.
- Backlit, engravable buttons
- · Requires neutral wire
- · Available with premium metal faceplates and a variety of stylish colors and finishes
- Combines beautiful aesthetics and flexible button configuration
- Zigbee 3.0



# **CONTROL4** LUX CONFIGURABLE KEYPAD

Model number

C4-L-KC-xx

Power requirements

120-240V AC +/- 10% 50/60 Hz

Neutral connection is required. See the Sample Wiring

Configurations later in the installation guide.

36-48V DC (low voltage bus) For details, see:

https://tech.control4.com/s/article/581

Power consumption (At 120V AC)

Power consumption (At 230V AC)

Power consumption (At 48V DC)

All LEDs off: 293mW, All LEDs on: 766mW

All LEDs off: 830mW, All LEDs on: 1.32W

All LEDs off: 144mW, All LEDs on: 864mW

Environmental

Operational temperature

0 to 40°C (32 to 104°F)

Humidity

5% to 95% non-condensing

Storage

-20 to 70°C (-4 to 158°F)

Miscellaneous

Control communications

Zigbee 3.0, IEEE 802.15.4, 2.4 GHz, 15-channel spread

spectrum radio

Wallbox volume

5.73in<sup>3</sup> (94cc)

Weight


0.05kg (0.12lb.)


Shipping Weight

0.08kg (0.18lb.)

Compatible color kits


C4-L-CKKC-XX or C4-L-CKUDIMSWITCH-XX









# **CONTROL4** LUX CONFIGURABLE KEYPAD

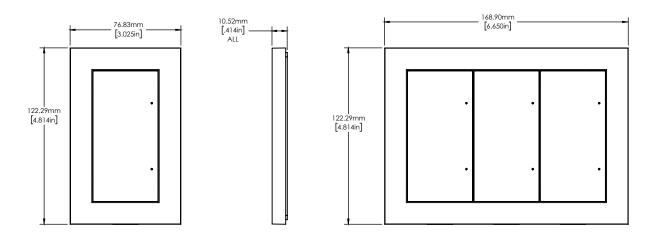



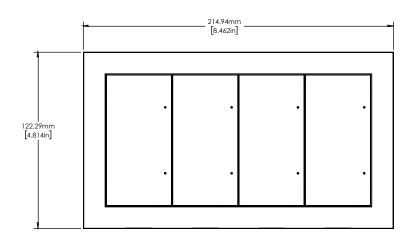


Note: Face Plates Sold Separately

# **CONTROL4** LUX CONFIGURABLE KEYPAD

#### **AVAILABLE BUTTON SIZES**

All keypads include 6 button "slots" to accommodate different button types and sizes. This setup allows for a flexible and customizable approach to your keypad design, making it easy to tailor the configuration to your specific needs.

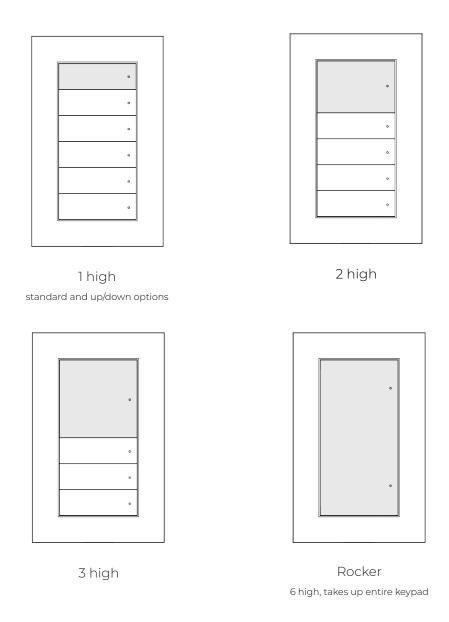


#### **Special Features**


- Rocker buttons can be utilized in any keypad configuration and will occupy all 6 slots.
- The motion dimmer feature requires a unique configuration: it includes a 5 high button and a single high motion lens occupying the last slot.




### POPULAR BUTTON CONFIGURATIONS




6 buttons of 1 high




5 buttons of 1 high plus one up/down button




3 buttons of 2 high



2 buttons of 3 high




Combination of 2 high and 4 single high buttons




Combination of 2 high and 3 single high buttons plus one up/down button

# **GANG PLATE CONFIGURATIONS**




1 gang

2 gang



3 gang



4 gang

# **CONTROL4** LUX COLORS AND FINISHES

