


The main module includes the following elements and connectors accessible to the installer:

- LAN connector (optional PoE 802.1af) for LAN connection
- IN1 terminals for input in passive / active mode (-30V to +30V DC)
OFF = open OR $U_{IN} > 1.5V$
ON = closed contact OR $U_{IN} < 1.5V$
- OUT1 active output: 8 up to 12 V DC depending on power supply (PoE: 10 V; adaptor: power supply voltage minus 2 V), max 400 mA
- RELAY1 terminals 30V/1A AC/DC NO/NC contact
- External 12V/2A DC power supply terminals
- Grounding terminal
- RESET / FACTORY RESET button
- LED indicators (red / green / yellow)
- LINE OUT connector (1VRMS)
- MIC connector for microphone connection
- Bus connector

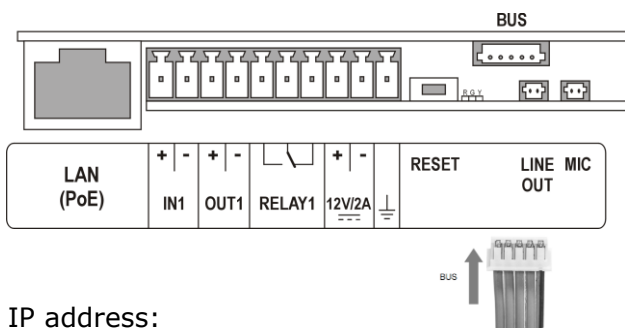

IP address:

- Default setting is DHCP ON
- To switch DHCP ON/OFF, press the button on main unit 15x within 30 seconds from boot up.
- To tell the IP address press the button on main unit 5x within 30 seconds from boot up.
- Press the dial button 4x within three seconds to identify the door station to Control4.

See ctrl4.co/ds2 for more information.

Declaration of Conformity:

Hereby, Control4 Corporation, declares that the product **Control4 DS2 Door Station** is in compliance with the essentials requirements and other relevant provisions of Directives

2014/53/EU, 2014/35/EU, 2014/30/EU and 2011/65/EU.

This equipment has been tested and found to comply with limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

This Class B digital apparatus complies with Canadian ICES-003.

This equipment has been tested and found to comply with limits of IEC 60950-1:2005 (Second Edition) and has received MET mark as the NRTL's certification mark for the North American Product Safety Requirements.

The full wording of these Declarations, see **www.control4.com**.