CONTROL4 LUX AUXILIARY KEYPAD



CONTROL4 LUX AUXILIARY KEYPAD C4-L-KA

The Control4 Lux Auxillary Keypad is an economical solution for three-way control of a load uses existing in-wall three-way wiring to wire directly to any compatible Control4 Dimmer, Switch, or Variable Speed Controller.

Features

- Excellent solution for 3-way load control using existing 3-way wiring
- Connects directly to the Lux load control devices for direct 3-way control
- · Available with premium metal faceplates and a variety of stylish colors and finishes
- · Economical solution for three-way control of a load



CONTROL4 LUX AUXILIARY KEYPAD

Model number | C4-L-KA-xx

Power requirements | 120-240V AC +/- 10% 50/60 Hz

Environmental

Operational temperature | 0 to 40°C (32 to 104°F)

Humidity 5% to 95% non-condensing

Storage -20 to 70°C (-4 to 158°F)

Miscellaneous

Wallbox volume 5.73in³ (94cc)

Weight 0.05kg (0.12lb.)

Shipping Weight | 0.08kg (0.18lb.)

Maximum supported keypads | 10 per load control device

Maximum distance from 45m (150ft) at 120V AC,

load control device 30m (100ft) at 240V AC

Compatible color kits | C4-L-CKKA-XX

Compatible devices

C4-L-UDIM | Lux Universal Dimmer

C4-L-KDS | Lux Keypad Dimmer Switch

C4-L-SW | Lux Switch

C4-L-TV Lux 0-10V Dimmer

C4-APD120 | Adaptive Phase Dimmer

C4-APD240 | Adaptive Phase Dimmer

C4-APD277 | Adaptive Phase Dimmer

C4-FPD120 Forward Phase Dimmer

C4-KD120 | Keypad Dimmer

C4-KD240 | Keypad Dimmer

C4-KD277 | Keypad Dimmer


C4-SW120277 | Switch


C4-SW240 Switch

C4-4SF120 | Fan Speed Controller



CONTROL4 LUX AUXILIARY KEYPAD

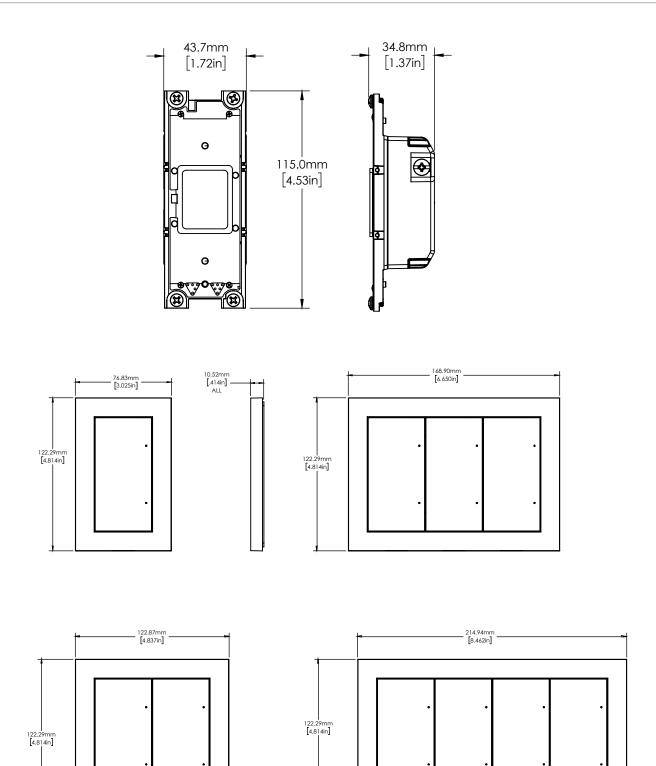





CONTROL4 LUX COLORS AND FINISHES

